

LEGEND® PPF Prime Plus (Cap Sheet) Technical Data Sheet

At 10 mil total thickness **LEGEND® Prime Plus** Paint Protection Film offers additional protection against debris impact damage. This extra protection adds to outstanding features of LEGEND® Prime series built to shield against rocks, insects, sand, salt, and other hazards that may damage the paint on your car. Our premium offering - PPF Prime Plus is practically invisible and protects your paint in virtually any climate zone and weather conditions. LEGEND® PPF Prime Plus offers versatile installation suiting the most challenging curves while requiring no post-installation maintenance.


Product benefits:

- Extra thickness for ultimate rock protection
- Outstanding Clarity
- Remarkable ease of installation
- Exceptional scratch, mar and stain resistance
- Excellent yellowing resistance
- Self-leveling Hydrophobic surface
- Long-lasting gloss and cleanliness
- Perfect combination of longevity, durability and toughness
- First in the Industry to offer 12 years limited warranty *

LEGEND® PPF Prime Plus Construction Details:

Total product thickness is 10mil (~250 micron)

Physical Properties		
Test	Value	Standard
Tensile Strength	8200psi	ASTM D882
Elongation at Break	450%	ASTM D882
Adhesive Peel Force	7.8-10.6 lbs/in	ASTM 3330

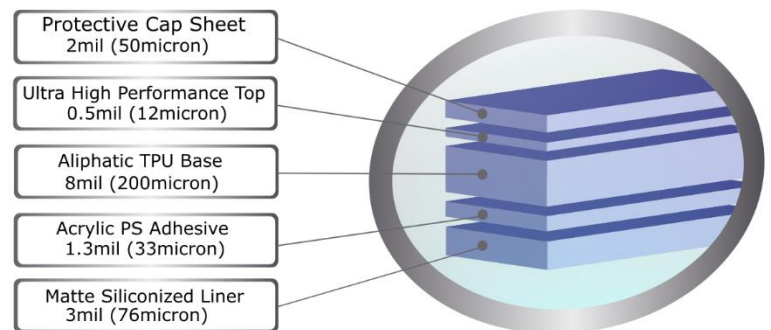

LEGEND® Self-Leveling Hydrophobic surface is formulated for long-lasting gloss retention. The minor scratches and mars caused by normal wear, such as car wash, are seamlessly eliminated over time. Our low surface energy of the topcoat prevents surface darkening caused by water-borne contamination. The car surface with LEGEND® Paint Protection Film installed retains attractive smooth high-gloss appearance for years to come maintenance free.

Conventional polyester urethane Top Coat



LEGEND® Self-Leveling Hydrophobic Surface





YOUR PAINT, OUR PROTECTION®

LEGEND® Yellowing, Stain and Chemical resistance comes as a result of careful formulation allowing our product to repel a wide variety of road-related contaminants such as tar, oil, transmission, radiator and windshield fluids. Also, LEGEND® Paint Protection Film is highly resistant to solvents, acids, bases, bug splatter, and bird droppings.

LEGEND® Longevity and Weatherability is a product of the collaboration of scientists and engineers, resulting in components that retain visual properties and performance for years to come. LEGEND® products are designed to meet most severe outside specifications for automotive, aerospace, transportation and heavy-duty requirements. LEGEND Paint Protection Film is tested by QUV and Xenon weathering, as well as high temperature and humidity exposure.

LEGEND® Chemical resistance is extensively tested by a variety of chemicals including harsh solvents such as Toluene, 2-Butanone, n-Butyl Acetate, Isopropyl Alcohol, and aqueous solutions of Hydrochloric acid, Sulfuric acid, and Sodium Hydroxide.

LEGEND® durability is tested by tensile testing as well as Gravelometer testing designed to evaluate the resistance of vehicle surface coatings to chipping caused by the impacts of gravel and other flying objects in accordance with SAE J400 standard. LEGEND® Paint Protection Film performs to the highest standards set by the market.

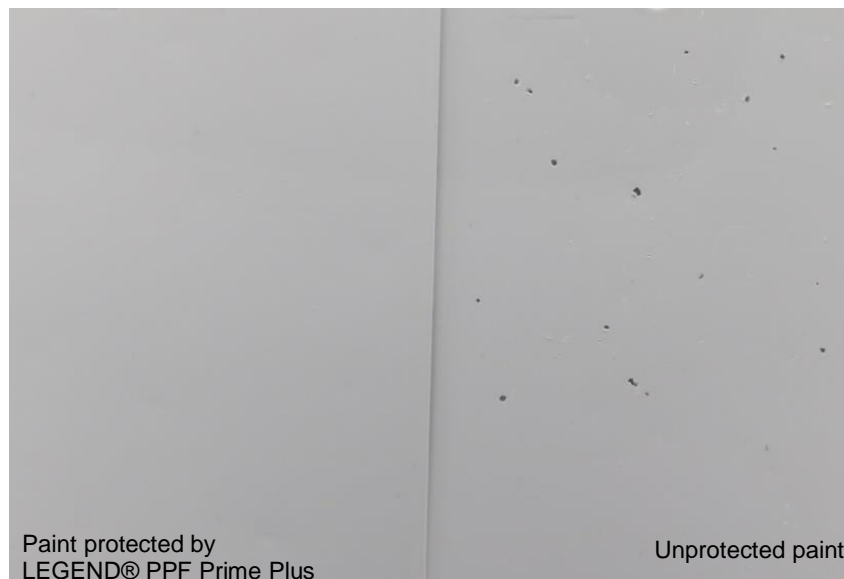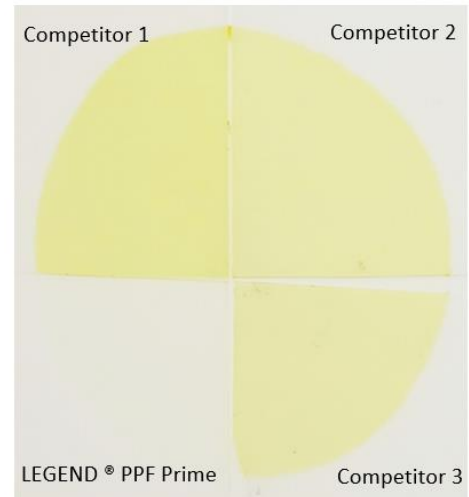

* Contact an authorized distributor/dealer for manufacturer's limited warranty details